

# KRAEMER

## “DDT” TYPE DOWNDRAFT TABLES


KRAEMER Pulse 4000



- Filter cartridges are 12 3/4" dia. by 22" long, no plate
- Pulse 4000 comes with a 3 hp, TEFC, 1750 rpm, H.E. motor
- Pulse 6000 comes with a 5 hp, TEFC, 1750 rpm, H.E. motor
- Starter is dust tight and magnetic, 3 phase, 60 cycles, Single phase available at an additional charge

- Sturdy, heavy duty, high efficiency down draft tables
- Comes with 4 or 6 filter cartridges
- Filter media is spun bonded polyester or paper
- For inside use
- Available in 2 sizes: KTM pulse 4000 39" x 78" (1m x 2m) and KTM pulse 6000 48" x 96"
- Cleaning is done with a compressed air blast, activated by a push button
- 3 side access to table
- Available in 3 phase and single phase


KTM Pulse 6000

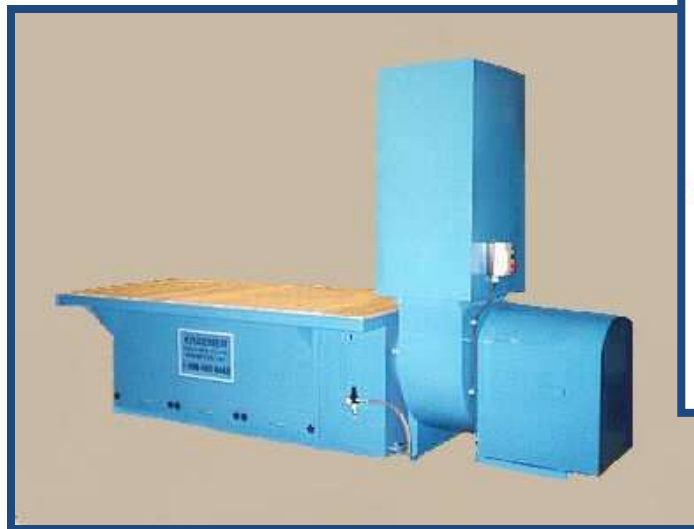

- Dust is collected in 2 bottom drawers for the Pulse 4000 and 3 bottom drawers for the Pulse 6000
- 95 psi compressed air for pulse cleaning is required
- Tables come with a silencer
- Tables work with 76 to 84 decibels, depending on location
- Standard colour is sapphire blue (custom colours are available)

*Optional features: Side panels, back draft deflectors, lift up lids with hand ports and viewing windows. Full canopy with working lights. Wood top or metal top, optional fume arms.*

# SELF-CLEANING DOWN DRAFT TABLES

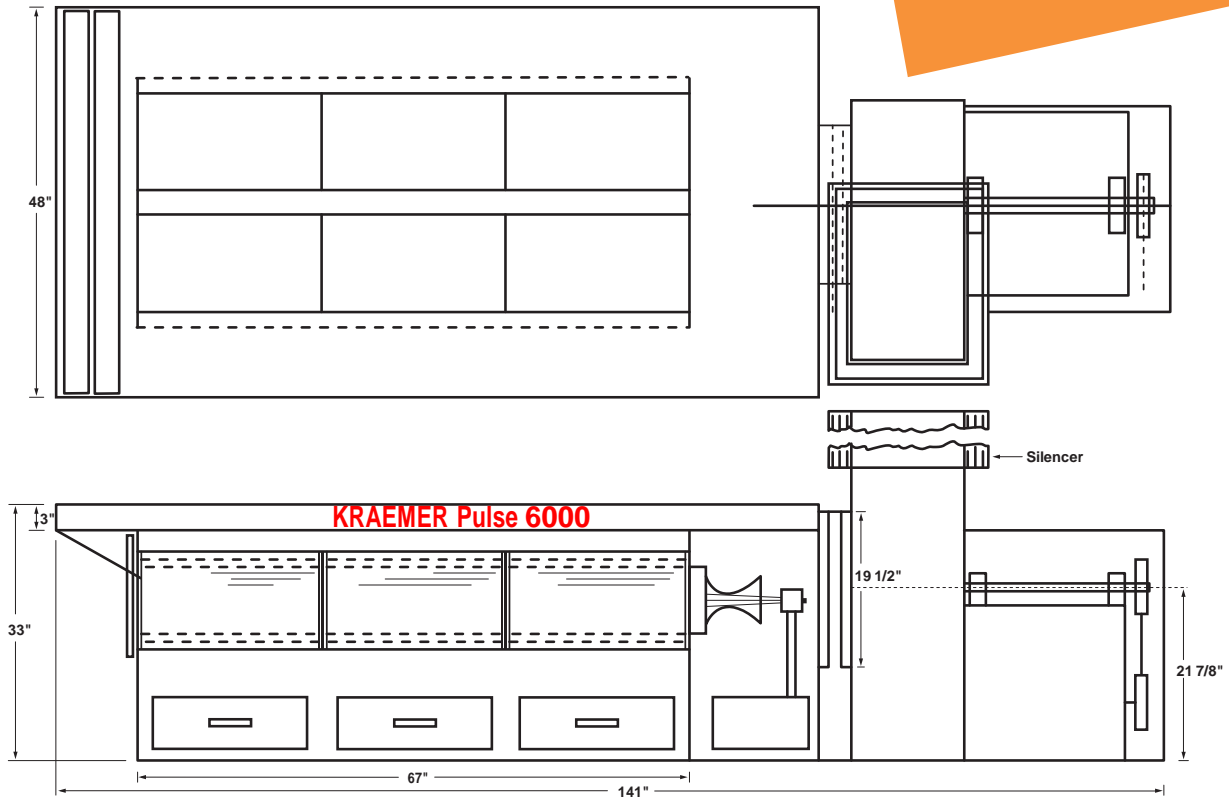

*Polyester filter cartridges are Pulse cleaned right in the system... and are made to last a long time. Replacement is fast & economical too!*



## Specifications for the Pulse 4000:

- Working area is 39" x 78" (1m x 2m)
- Table top slats are hardwood or baked enamel metal slats
- Slats are chevron shaped
- Total height of table is 33"
- Total height of silencer/blower package is 69"
- Total length is 117"
- Filter area is 520 sq ft
- Blower capacity is 3500 cfm
- 2 Collection drawers
- 4 filter cartridges, 22" long, 2 pcs open-open, 2 pcs open-closed
- 1 x 110V/1/60 cycle connection is required for pulse sequencer
- Quiet operation

Both the Pulse 4000 and Pulse 6000 are ideally suited for sanding, polishing, grinding and non-explosive fumes and vapours.

Used on Metal, wood, plastic, stone, glass, leather etc.

## Specifications for the Pulse 6000:

- Working area is 48" x 96"
- Table top slats are hardwood or baked enamel metal slats
- Slats are chevron shaped
- Total height of table is 33"
- Total height of silencer/blower package is 69"
- Total length is 141"
- Filter area is 780 sq ft
- Blower capacity is 6000 cfm
- 3 Collection drawers
- 6 filters cartridges, 22" long, 4 pcs open-open, 2 pcs open-closed
- 1 x 110V/1/60 cycle connection is required for pulse sequencer
- Quiet operation
- Our products are covered by a 12 month (1-Year) warranty against defects in workmanship or materials.
- Motors, Impellers and filters are excluded



## KRAEMER MFG.

1202 Barton Street, Stoney Creek, Ontario Canada L8E 5G9  
1-800-443-6443 Fax: 1-866-229-5792  
www.kraemerMFG.com